

FinePak

Secondary Bag Filter



Product Overview

- High-loft, layered, synthetic media improves performance
- High Dust Holding Capacity / Low resistance
- Available in five efficiencies: M5, M6, F7, F8, F9
- Ultrasonically-welded pocket spacers and edges
- Applicable to variable air velocity
- UL 900 Certificated


Typical Applications

Commercial Buildings	Hospitality & Healthcare	Pharmaceutical	Museums & Historic Storage
Food & Beverage	Schools & Universities	Microelectronics	Subway Station & Railway Station

Specifications

Filter depth	12~36"
Efficiency	M5, M6, F7, F8, F9
Media	Synthetic MB media
Frame material	GI/AL
Supporting	Galvanized steel wire
Max operating temperature	158°F (70°C)
Special size available	Yes

Initial Resistance vs Face Velocity

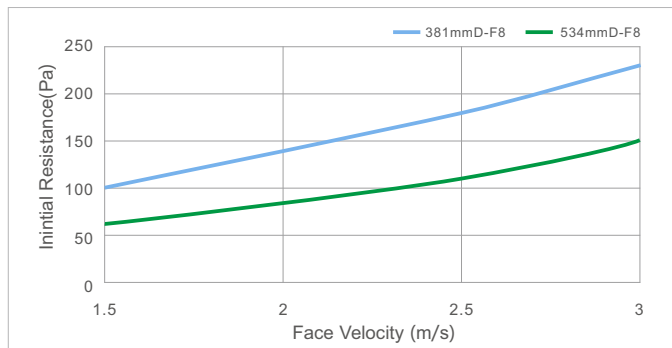

Standard Size and Performance Parameters

Nominal Size (Inches) W x H x D	Actual Size (mm) W x H x D	Pockets (pcs)	Initial Resistance (Pa)					Rated Face Velocity (m/s)
			M5	M6	F7	F8	F9	
24"								
24 x 24 x 24	594 x 594 x 610	8	55	60	80	105	160	2.5
20 x 24 x 24	492 x 594 x 610	6	55	60	80	105	160	2.5
20 x 20 x 24	492 x 492 x 610	5	55	60	80	105	160	2.5
12 x 24 x 24	289 x 594 x 610	4	55	60	80	105	160	2.5
21"								
24 x 24 x 21	594 x 594 x 534	8	55	65	85	110	170	2.5
20 x 24 x 21	492 x 594 x 534	6	55	65	85	110	170	2.5
20 x 20 x 21	492 x 492 x 534	5	55	65	85	110	170	2.5
12 x 24 x 21	289 x 594 x 534	4	55	65	85	110	170	2.5
15"								
24 x 24 x 15	594 x 594 x 381	8	75	85	135	180	200	2.5
20 x 24 x 15	492 x 594 x 381	6	75	85	135	180	200	2.5
20 x 20 x 15	492 x 492 x 381	5	75	85	135	180	200	2.5
12 x 24 x 15	289 x 594 x 381	4	75	85	135	180	200	2.5

Additional size available upon request

