

TA-Smart



Smart control

2-way control valve with uniquely shaped EQM characteristics with flow, temperature and power measurement capabilities

TA-Smart

The ultrasonic flow measurement technology combined with unique actuation algorithms capabilities provide best-in-class control performances. The TA-Smart controls can be set to flow or power, giving high on-site flexibility and providing highly effective comfort in heating and cooling applications. Its compact arrangement and simple set-up reduces installation and commissioning time.

Key features

- > **Best-in-class control**
Accurate and fast control response even at very low flows in common part load conditions. Ensures full modulating control for the complete operating stroke leading to world class control and efficiencies.
- > **Optional cloud connection**
Easy remote access to data and configuration parameters allows to verify and adjust system performance.
- > **High measurement accuracy**
High flow and temperature measurement accuracies in all configurations (medium type, and temperature) for all flow regimes.
- > **Compactness and limited number of components**
Reduces installation time and space requirements facilitating retrofit installation.
- > **Convenient, reliable setup**
Fully customizable and commissionable using Bluetooth enabled smart device reducing commissioning and diagnostic time.
- > **Easy diagnostics**
Continuous measurement (flow, temperature, power...) enables accurate error identification in system hydronics.
- > **Versatility in communication**
Digital (key Bus protocols and MQTT) and Analog (0(2)-10 VDC or 0(4)-20 mA).



Technical description

Application:

Heating and cooling systems.

Functions:

Control (flow, power, position)
Pre-setting (max./min. flow, max. power, max./min. position)
Reading (flow, power, energy, supply/return temperature, ΔT , position)
Manual override (via HyTune app)
Mode, status and position indication
Valve blockage protection
Valve clogging detection
Error safe position
Diagnostic
Logging
Delayed start-up

Dimensions:

DN 32-80

Pressure class:

DN 32-50: PN 25
DN 65-80: PN 16, PN 25

Differential pressure (ΔpV):

Max. differential pressure (ΔpV_{max}):
400 kPa = 4 bar
Closing pressure: 600 kPa
 ΔpV_{max} = The maximum allowed pressure drop over the valve to fulfill all stated performances.

Flow range:

The flow ranges (q_{setmin} - q_{nom}) for different dimensions:
DN 32: 920 - 4600 l/h
DN 40: 1560 - 7800 l/h
DN 50: 2680 - 13400 l/h
DN 65: 5800 - 29000 l/h
DN 80: 8640 - 43200 l/h
Minimum controllable flows 0.5% q_{nom}

Measurement accuracy:

Flow:
 $\pm 3\%$ from 5% to 100% of q_{nom} (see "Flow accuracy")
Temperature:
 ± 0.1 K @ $\Delta T = 6$ K (for cooling)
 ± 0.15 K @ $\Delta T = 10$ K (for heating)
 ± 0.2 K @ $\Delta T = 20$ K (for heating)

Control accuracy:

$\pm 5\%$ from 4% to 100% of q_{nom}
 $\pm 10\%$ from 0.5% to 4% of q_{nom}

Temperature:

Max. working temperature: 110°C
Min. working temperature: -10°C
Operating environment: 0°C – +50°C (5-95%RH, non-condensing)
Storage environment: -20°C – +70°C (5-95%RH, non-condensing)

Media:

Water or neutral fluids, water-glycol mixtures (0-57%).

Leakage rate:

Leakage flow $\leq 0.02\%$ of q_{nom} and correct flow direction.
(Class IV according to EN 60534-4).

Characteristics:

Settable: Stepless between EQM 0.25 and inverted EQM 0.25.

Supply voltage:

24 VAC/VDC $\pm 15\%$.
Frequency 50/60 Hz ± 3 Hz.

Power consumption:

DN 32-50:
Operation: < 4.0 W (24 VDC),
< 5.6 VA (24 VAC)
Standby: < 1.9 W (24 VDC),
< 3.3 VA (24 VAC)
DN 65-80:
Operation: < 5.8 W (24 VDC),
< 10 VA (24 VAC)
Standby: < 1.9 W (24 VDC),
< 3.3 VA (24 VAC)

Input signal:

By BACnet/Modbus or Analog signal.
Analog in VDC or mA, selectable by jumper in the SmartBox;
0(2)-10 VDC, R_i 47 k Ω .
Adjustable sensitivity 0.1-0.5 VDC.
0.33 Hz low pass filter.
0(4)-20 mA R_i 500 Ω .
Proportional:
0-10, 10-0, 2-10 or 10-2 VDC.
0-20, 20-0, 4-20 or 20-4 mA
Proportional split-range:
0-5, 5-0, 5-10 or 10-5 VDC.
0-4.5, 4.5-0, 5.5-10 or 10-5.5 VDC.
2-6, 6-2, 6-10 or 10-6 VDC.
0-10, 10-0, 10-20 or 20-10 mA.
4-12, 12-4, 12-20 or 20-12 mA.
Proportional dual-range (for change-over):
0-3.3 / 6.7-10 VDC,
10-6.7 / 3.3-0 VDC,
2-4.7 / 7.3-10 VDC or
10-7.3 / 4.7-2 VDC.
Default setting: Proportional 0-10 VDC.

Output signal:

BACnet/Modbus
0(2)-10 VDC, max. 8 mA, min. 1.25 k Ω .

Wireless:

Bluetooth Low Energy (BLE)
Thread

Sensor cable:

DN 32-50: 3 m halogen free
DN 65-80: 5 m halogen free

Ingress protection:

IP54 (according to EN 60529)

Protection class:

According to EN 61140.
III (SELV)

Material:

DN 32-50:
Valve body: AMETAL[®]
Valve insert: AMETAL[®]
Valve plug: AMETAL[®] and PTFE
Spindle: Stainless steel
Spindle seal: EPDM O-ring
Internal plastic parts: PPS
Springs: Stainless steel
O-rings: EPDM

Temperature housing: AMETAL[®].

DN 65-80:
Valve body: Ductile iron EN-GJS-400-15
Valve insert: Ductile iron EN-GJS-400-15 and brass
Valve plug: Stainless steel and EPDM
O-ring
Valve seat: Stainless steel
Spindle: Stainless steel
Spindle seal: EPDM
Springs: Stainless steel
O-rings: EPDM

SmartBox (DN 32-80):
Cover: PC/ABS, red.
Housing: PC/ABS, TPE.

Actuators:
DN 32-50:
Cover: PC/ABS GF8, white RAL 9016,
grey RAL 7047.
Housing: PA GF40.
Swivelling nut: Nickel-plated brass.

DN 65-80:
Cover: PBT, orange RAL 2011, grey
RAL 7043.
Bracket: Alu EN44200

Wires: Halogen free

AMETAL[®] is the dezincification resistant alloy of IMI Hydronic Engineering.

Surface treatment:

DN 32-50: Non treated
DN 65-80: Electrophoretic painting

Marking:

Valve body:
DN 32-50: IMI TA, PN, DN, inch size, country of origin and flow direction arrow.
DN 65-80: IMI TA, DN, inch size, material and flow direction arrow. Label with technical specification, country of origin and CE.
SmartBox: IMI TA
Actuator: IMI TA, model, technical spec., LED info


Pipe connection:

DN 32-50: Male thread according to ISO 228.
DN 65-80: Flanges according to EN-1092-2, type 21. Face to face length according to EN 558, series 1.

Certification and directives:


EMC-D. 2014/30/EU: EN 60730-1, -2-14.
Product standards EN 60730-x.
PED: 2014/68/EU

Flow accuracy

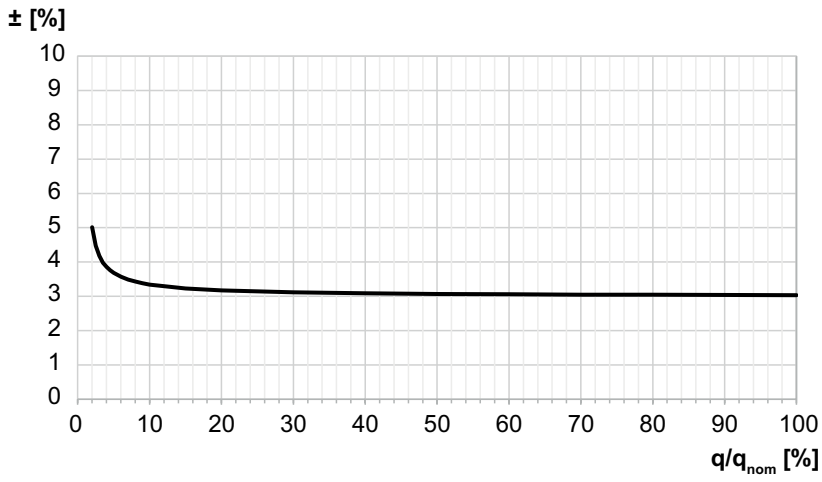


Installation



DN 32-50





DN 65-80

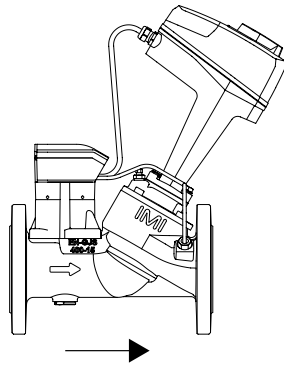


DN 32-50




DN 65-80



DN 32-50




DN 65-80

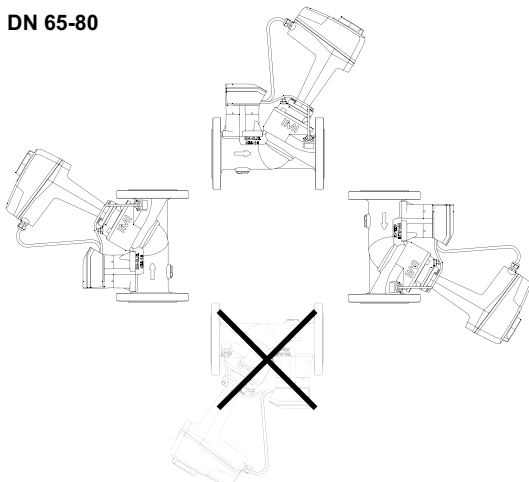


Note: Free space is required above the actuator for easy mounting/dismounting.



DN 32-50



DN 65-80

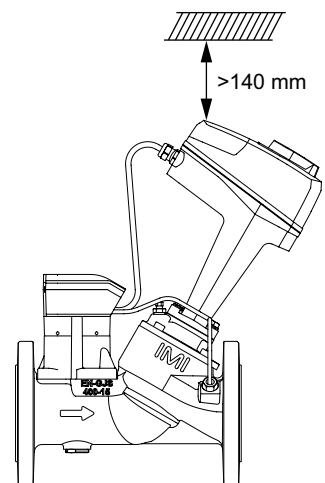

Articles



DN 32-50


Including temperature housing.
Male threads according to ISO 228.

DN	D	L	H	W	Kvs	Kg	EAN	Article No
32	G1 1/2	226	223	97	7,28	2,1	7318794164307	322231-00032
40	G2	232	227	97	12,3	3,0	7318794164406	322231-00040
50	G2 1/2	245	235	97	21,3	3,9	7318794164505	322231-00050

Temperature housing incl. temperature pocket

Included in TA-Smart DN 32-50.
Female threads according to ISO 228.

DN	D1	L1	H1
32	G1 1/4	66	70
40	G1 1/2	67	76
50	G2	68	89

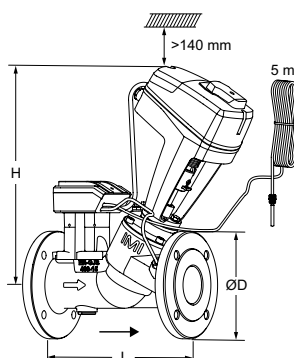


DN 65-80

Including temperature pocket. Free space >70 mm is required above the temperature pocket.
Flanges according to EN-1092-2, type 21.

DN	Number of bolt holes	D	L	H	Kvs	Kg	EAN	Article No
PN 16								
65	4	185	290	377	50	16,5	7318794171206	322231-01265
80	8	200	310	380	70	18,6	7318794171305	322231-01280
PN 25								
65	8	185	290	377	50	16,5	7318794170803	322231-01365
80	8	200	310	380	70	18,6	7318794170902	322231-01380

→ = Flow direction

Connections




With female thread

Threads according to ISO 228. Thread length according to ISO 7-1.

Swivelling nut
Brass/AMETAL®

Valve DN	D	D1	L*	EAN	Article No
32	G1 1/2	G1 1/4	31	7318794017207	52 163-032
40	G2	G1 1/2	30	7318794032705	52 163-040
50	G2 1/2	G2	32	7318794032804	52 163-050




With male thread

Threads according to ISO 7-1.

Swivelling nut
Brass


Valve DN	D	D1	L*	EAN	Article No
32	G1 1/2	R1 1/4	38,5	4024052517213	0601-05.350



Welding connection

Swivelling nut
Brass/Steel 1.0045 (EN 10025-2)


Valve DN	D	Pipe DN	L*	EAN	Article No
32	G1 1/2	32	40	7318792748806	52 009-032
40	G2	40	45	7318792748905	52 009-040
50	G2 1/2	50	50	7318792749001	52 009-050



Soldering connection

Swivelling nut
Brass/gunmetal CC491K (EN 1982)

Valve DN	D	Pipe Ø	L*	EAN	Article No
32	G1 1/2	35	26	7318792749803	52 009-535
40	G2	42	30	7318792749902	52 009-542
50	G2 1/2	54	35	7318792750007	52 009-554



Connection with smooth end


For connection with press coupling

Swivelling nut
Brass/AMETAL®

Valve DN	D	Pipe Ø	L*	EAN	Article No
32	G1 1/2	35	59	7318793811004	52 009-335
40	G2	42	70	7318793811103	52 009-342
50	G2 1/2	54	80	7318793811202	52 009-354

*) Fitting length (from the gasket surface to the end of the connection).

Accessories




Temperature pocket

Included in TA-Smart DN 65-80.

For mounting directly on pipe. Free space >70 mm is required above the temperature pocket.

	EAN	Article No
G1/4	7318794174009	322230-00400



Temperature sensor

Included in TA-Smart (3 m DN 32-50, 5 m DN 65-80).

Length [m]	EAN	Article No
3	7318794173705	322230-01100
5	7318794173804	322230-01101

